




Modelos normalizados, gama termostatos a bulbo unipolares

Termostatos a bulbo y capilar unipolares

Código	Gama termostato	Escala	Características	Intensidad máxima (-240 V)	Peso en Kg
3509310324	CA	0 / 40 °C	Bulbo Cobre Ø6,5x142 mm Capilar 1m. 3 Faston	16 A	0,11
3509310320	CA	0 / 90 °C	Bulbo Cobre Ø6,5x66 mm Capilar 1m. 3 Faston	16 A	0,11
3509310321	CA	0 / 120 °C	Bulbo Cobre Ø6,5x66 mm Capilar 1m. 3 Faston	16 A	0,11
3509310321/ESP	CA	0 / 120 °C	Bulbo Cobre Ø6,5x66 mm Capilar 1m recubierto PVC. 3 Faston	16 A	0,11
3509310322	CA	0 / 200 °C	Bulbo Inox Ø5x98 mm Capilar 1m. 3 Faston	16 A	0,11
3509310322/ESP	CA	0 / 200 °C	Bulbo Inox Ø5x98 mm Capilar 1m recubierto Silicona. 3 Faston	16 A	0,11
3509310323	CA	0 / 320 °C	Bulbo Inox Ø3x195 mm Capilar 1m. 3 Faston	16 A	0,11
517350000	CT1	0 / 90 °C	Bulbo Cobre Ø6x99 mm Capilar 1m. 2 Faston	20 A	0,06
517355000			Botón + embellecedor 0 / 90 °C		0,01
517352000	CT2	30 / 160 °C	Bulbo Cobre Ø6x88 mm Capilar 1m. 2 Faston	20 A	0,06
517357000			Botón + embellecedor 30 / 160 °C		0,01

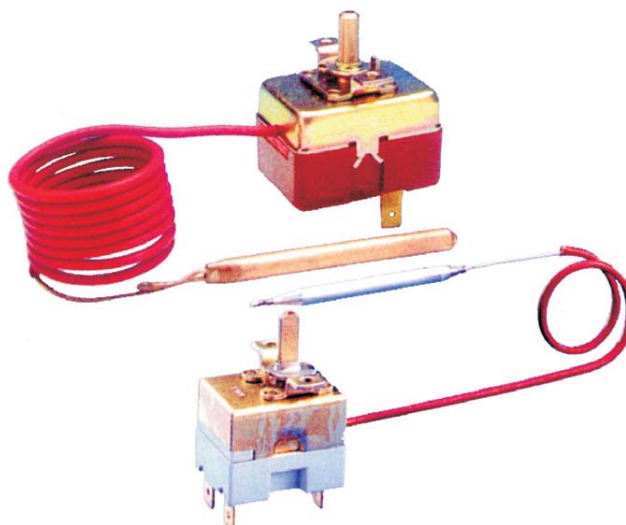

C./ Ca n'Alzamora, 34-36
Tel +34 935 860 045
www.electricfor.com

08191 – Rubí – Barcelona – España
Fax +34 935 860 048
electricfor@electricfor.com